

SATISFY THE CONCERNS
OF DEMANDING REGULATORY AND
ENVIRONMENTAL AGENCIES WITH
PROPER SILT FENCE INSTALLATION

**ECONOMY
PLOW**

NEW ECONOMY PLOW



Use Half the Time – Half the Crew!

Eliminate many of the costly failures associated with silt fence collapses, washouts, sags, and other time-consuming problems involved in typical installations.

Patented under the following patents:
#7,144,202 - #7,044,689 - #D502470 - #D504134

WWW.THESILTFENCEPLOW.COM

|

515.669.3427


ECONOMY PLOW FEATURES & SPECIFICATIONS



TUBE STEEL A-FRAME DESIGN
Tube Steel A-frame design with 1" stringers



SPRING-LOADED COULTER
Standard spring loaded, hardened-steel 16" diameter fluted coulter cuts through tough soil, tree roots and vegetation.

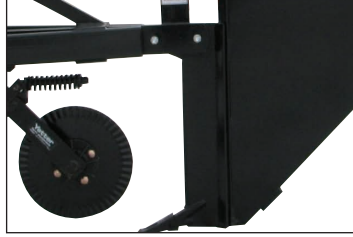

3/4" THICK MOLEBOARD KNIFE is standard equipment. Stainless steel parts in key wear areas and specially designed fabric chute installs fabric in a tight consistent snag free manner.



KNIFE POINT
Replaceable hardened-steel knife point is designed to disrupt the soil upward for easier pulling and proper silt fence installation.



CAT. I AND II HOOKUP PINS
Cat. I and II hookup pins for easy 3 point hookup or quick attach skid loader mounting plate for easy mounting.



RETRACTABLE LEGS
Retractable legs positioned at an angle keep the machine stable when unhooked.



FABRIC TENSION SPRING AND 16" DIAMETER FABRIC PLATES
Simple easy to adjust fabric tension spring allows for quick adjustment. 16" Diameter fabric plates prevent the fabric from telescoping over the plates during installation.



UNIQUE POSITIVE FEED DESIGN of the silt fence plow allows silt fence to be installed in a fast, tight and effective manner. Stainless steel in the key wear areas of the fabric chute ensure low maintenance.



SHEAR BOLT PROTECTION
Shear bolt protection with hardened bushing for plow blade



FRONT PIVOT
Simple front pivot allows for tight turns.

PLOW SPECIFICATIONS

MODEL	ET-SFP36	ET-SFP42	ET-SFP48	ES-SFP36	ES-SFP42	ES-SFP48
Height	67"	67"	67"	67"	67"	67"
Width	39"	39"	39"	46"	46"	46"
Length	100"	100"	100"	96"	96"	96"
Weight	600 lbs.	645 lbs.	683 lbs.	577 lbs.	622 lbs.	660 lbs.

Model ET-SFP units are dedicated three point hitch hookups
Model ES-SFP units are dedicated skid loader hookups

OPTIONAL EQUIPMENT



FC-1136 36" FABRIC CURTAIN
The fabric curtain is a plastic divider that separates the fabric so it does not rub against itself when going through the fabric chute. It is only needed when using non-woven fabrics to prevent the fabric from grabbing itself and pulling down. With slick woven fabric, the divider is not needed.



HTL-1055 HYDRAULIC TOP LINK CYLINDER
The hydraulic top link cylinder (required for 3 pt hitch mountings) goes in place of the rigid top link on the tractors 3 pt hitch. This allows the operator to adjust the pitch of the knife on the machine so it doesn't nose dive or try to come out of the ground.



CPS-1050 CENTER PULL SKIDLOADER PLATE
Skid Loader quick-attach to 3 point hitch adapter allows the Silt Fence Plow to be operated with a Skid Loader and off of a tractor.

PLEASE NOTE: Due to McCormick Equipment's continual improvements of its products, production changes may cause your machine to appear slightly different in detail.



CHRIS McCORMICK

185 Hwy. 92, Pleasantville, IA 50225

Cell: 515.669.3427 Shop: 515.848.3101 Fax: 515.848.5900

www.thesiltfenceplow.com Email: chris@thesiltfenceplow.com

DEALER INFO: