



NEW

PUSH PULL ROTARY OFFSET SILT FENCE PLOW



RUGGED AND RELIABLE
BUILT TO TAKE THE ABUSE OF A FAST MOVING CONSTRUCTION SITE

Can you afford NOT to own one?

Avoid fines | Save time and labor | Install it right the first time
Many customers say *The Silt Fence Plow*® pays for itself on the first job.

Patented under the following patents:
#7,144,202 - #7,044,689 - #D502470 - #D504134



WWW.THESILTFENCEPLOW.COM

|

515.669.3427

PUSH PULL SILT FENCE PLOW FEATURES & SPECIFICATIONS



DEDICATED QUICK ATTACH SKID LOADER HITCH provides easy on and off. Both have retractable legs to keep the machines steady when unhooked.



FORKLIFT / HOIST SLOTS for easy moving.

6" x 4" x 3/8" TUBE STEEL MAIN FRAME for the strongest built plow in the industry.



SIMPLE ROTARY OFFSET DESIGN

allows you to quickly offset to either side of center to pull. It allows you to swing the machine over either side of center to push the silt fence plow forward. By aligning two pins the machines offset position can be changed while it is in the ground.




90° REAR PIVOT SWING The rear pivot can swing 90° either side of center. The rear pivot design provides the tightest turning radius available. Massive 2" x 8" pivot pins ensure years of dependable service.



FABRIC TENSION SPRING AND 16" DIAMETER FABRIC PLATES

Simple easy to adjust fabric tension spring allows for quick adjustment. 16" Diameter fabric plates prevent the fabric from telescoping over the plates during installation.

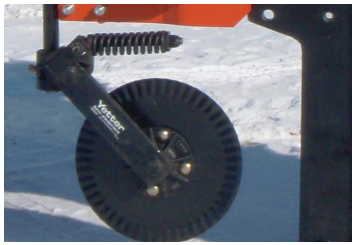

SPRING LOADED COULTER with hardened steel blade cuts through tree roots and vegetation.



1" THICK MOLEBOARD KNIFE is standard equipment. Stainless steel parts in key wear areas and specially designed fabric chute installs fabric in a tight consistent snag free manner.



REPLACEABLE HARD SURFACED PLOW POINT is designed to disrupt the soil upward for easier pulling and proper silt fence installation.

PLOW SPECIFICATIONS

MODEL	PP-SFP36	PP-SFP42	PP-SFP48
Height			
Knife Setting			
Top:	76"	76"	76"
Bottom:	71"	71"	71"
Width	60"	60"	60"
Length	120"	131"	137"
Weight	1,090 lbs.	1,105 lbs.	1,165 lbs.
Offsetting Ability			
In pull positions	29" and 40"	29" and 40"	29" and 40"
from center	from center	from center	from center
Offset in push			
position from	51"	51"	51"
center			

PLEASE NOTE: Due to McCormick Equipment's continual improvements of its products, production changes may cause your machine to appear slightly different in detail.

OPTIONAL EQUIPMENT



RWU-1056 WIRE UNROLLER

The wire unroller mounts on either side of the machine. It allows a roll of wire to be unrolled as the fabric is being sliced into the ground.

CAN BE USED ONLY WHEN MACHINE IS BEING PULLED. IT WILL NOT INSTALL THE WIRE INTO THE GROUND.



FC-1136 36" FABRIC CURTAIN

The fabric curtain is a plastic divider that separates the fabric so it does not rub against itself when going through the fabric chute. It is only needed when using non-woven fabrics to prevent the fabric from grabbing itself and pulling down. With slick woven fabric, the divider is not needed.



CHRIS McCORMICK

185 Hwy. 92, Pleasantville, IA 50225

Cell: 515.669.3427 Shop: 515.848.3101 Fax: 515.848.5900

www.thesiltfenceplow.com Email: chris@thesiltfenceplow.com

DEALER INFO: